

TECHNICAL INFORMATION



PRODUCT

P 1 / 1

Models No. ▶ EM2600U/ EM2600L

Description ▶ Petrol Brushcutter

CONCEPT AND MAIN APPLICATIONS


Models EM2600U and EM2600L are petrol brushcutters equipped with environment-friendly 25.7mL 2-stroke engine.

Their main features are:

- Complies with European exhaust emission regulations of EPA Phase 2 and EU stage 2 by catalyst.
- Easy start with spring-assisted recoil starter reduces user's fatigue by drastic reduction of resistance caused when the starter rope is pulled.

EM2600U is Bike handle model.

EM2600L is Loop handle model.

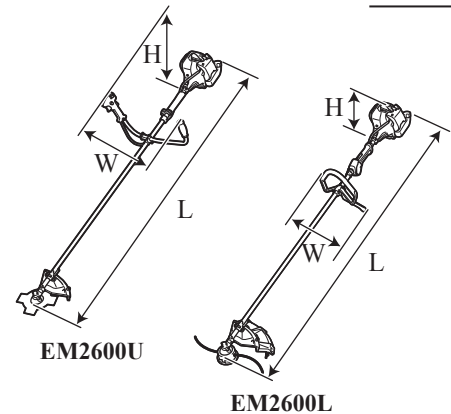

Dimensions: mm (")		
	EM2600U	EM2600L
Length (L)	1,770 (69-3/4)	
Width (W)	610 (24)	310 (12-1/4)
Height (H)	410 (16-1/8)	235 (9-1/4)

Specification

Specification		Model	EM2600U	EM2600L
Engine	Type		2-stroke	
	Displacement: mL (cu.in.)		25.7 (1.6)	
	Fuel		Mixed gasoline (Mixture ratio of 25:1 [50:1 with specific oil])	
	Max. output: kW		0.83 [at 8,000 min. ⁻¹]	
	Max. torque: N.m		1.14 [at 6,500 min. ⁻¹]	
No load speed*1: min. ⁻¹ = rpm			8,800	
Fuel tank capacity: L (US oz)			0.6 (20)	
Carburetor			Diaphragm	
Starting system	Recoil/Electric		Recoil	
	Easy start (Spring-assisted recoil starter)		Yes	
	Decompression valve		No	
Primer pump			Yes	
Clutch			Yes	
Revolution limiter			No	
Spindle thread size			M8x1.25, Left-handed	
Handle style			Bike handle*2	Loop handle
Net weight*3: kg (lbs)			5.0 (11.0)	4.9 (10.8)

*1 No load speed of the cutting tool

*2 Off-set design

*3 Dry weight, without guard, cutting tool and shoulder harness

Standard equipment

- Nylon cutting head 1
- Star blade (4 tooth metal blade) 1
- Hex wrench 1
- Socket wrench 10-13 1
- + Screwdriver 1
- Accessory bag 1
- Shoulder harness with single shoulder strap 1

Note: The standard equipment for the tool shown above may vary by country.

Optional accessories

No